




DIELECTRIC SERIES FUSION SPLICE PROTECTION SLEEVE

Splice Technologies' "Dielectric" series fusion splice protection sleeve is identical in size as our "Standard" series splice sleeve with the exception of a non-metallic strength member. Stock lengths are available in 40 and 60mm with an after shrink diameter of **2.9mm** and will accommodate fiber diameters up to **1.4mm**. This product is constructed with an EVA meltable adhesive inner tube, a polyolefin heat shrink outer tube, and a fiberglass strength member. The tubes are clear to allow viewing of the fiber during and after splicing. The entire assembly is designed to ensure that all members maintain perfect alignment during shipping, handling and shrinking. We are proud to say that all of our products are made here in the **USA** and most sleeves are in stock ready for immediate delivery.

FEATURES

- Bellcore GR-1380 Compliant
- RoHS & REACH Compliant
- Outer tube meets SAE AMS-DTL-23053/5 Class 2
- Inner EVA meltable adhesive tube
- Full length strength member for total fiber support
- Close dimensional tolerances
- Open ended assembly minimizing possibility of air entrapment during shrinkage
- Operating Temperature Range -55°C to +110°C
- Packaged in 50 per bag

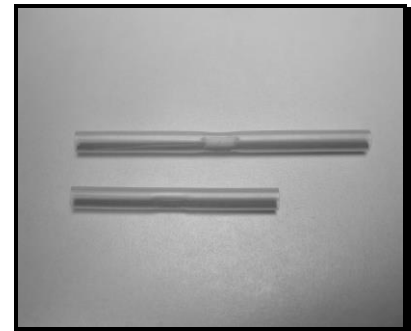

PART NUMBER KEY

FSS-DC40 40mm length
FSS-DC60 60mm length

FOR ORDERS AND QUOTES

Phone: 1-631-924-8108
Fax: 1-631-924-8109
Email: sales@splicetechnologies.com
Website: www.splicetechnologies.com