


## **DIELECTRIC SERIES FUSION SPLICE PROTECTION SLEEVE**

**Splice Technologies' "Dielectric"** series fusion splice protection sleeve is identical in size as our "Standard" series splice sleeve, with the exception of a non-metallic strength member. Stock lengths are available in 40 and 60mm with an after shrink diameter of **2.9mm** and will accommodate fiber diameters up to **1.4mm**. This product is constructed with an inner EVA meltable adhesive tube, fiberglass strength member and a polyolefin heat shrink outer tube. The tubes are clear to allow viewing the color of the fiber after splicing. The entire assembly is heat bonded to ensure that all members maintain perfect alignment during shipping, handling and shrinking. We are proud to say that all of our products are made here in the USA and most sleeves are in stock ready for immediate delivery.

### **FEATURES**

- Bellcore GR-1380 Compliant
- RoHS & REACH Compliant
- Outer tube meets SAE AMS-DTL-23053/5 Class 2
- Inner EVA meltable adhesive tube
- Full length strength member for total fiber support
- Close dimensional tolerances
- Heat bonded assembly
- Open ended assembly minimizing possibility of air entrapment during shrinkage
- Packaged in 50 per bag

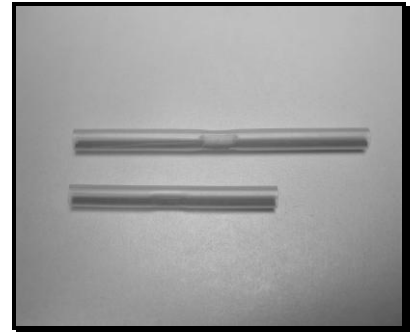

### **PART NUMBER KEY**

FSS-DC40 40mm length  
FSS-DC60 60mm length

### **FOR ORDERS AND QUOTES**

Phone: 1-631-924-8108  
Fax: 1-631-924-8109  
Email: [sales@splicetechnologies.com](mailto:sales@splicetechnologies.com)  
Website: [www.splicetechnologies.com](http://www.splicetechnologies.com)