




FLAME RETARDANT SERIES FUSION SPLICE PROTECTION SLEEVES

Splice Technologies’ “FLAME RETARDANT” Series fusion splice protection sleeves are designed for use in environments requiring an upgraded flammability rating meeting UL and CSA VW-1 requirements. Our Standard & Slim series are available in 40 & 60mm lengths with after shrink diameters of **2.9mm & 2.6mm** respectively and will accommodate fiber diameters up to 1.4mm. Our Mini & Micro series are available in 25 & 40mm lengths with after shrink diameters of **2.0mm & 1.5mm** respectively and will accommodate fiber diameters of 900um & 450um respectively. All of these series products are constructed with an EVA meltable adhesive inner tube, black heat shrink outer tube, and a stainless steel strength member. The entire assembly is designed to ensure that all members maintain perfect alignment during shipping, handling and shrinking. We are proud to say that all of our products are made here in the **USA** and most sleeves are in stock ready for prompt delivery.

FEATURES

- RoHS & REACH Compliant
- Outer tube meets SAE AMS-DTL-23053/5
- UL & CSA VW-1 rating
- Inner meltable adhesive tube
- Full length strength member for total fiber support
- Close dimensional tolerances
- Open ended assembly minimizing possibility of air entrapment during heat shrinking
- Operating Temperature Range -55°C to +110°C

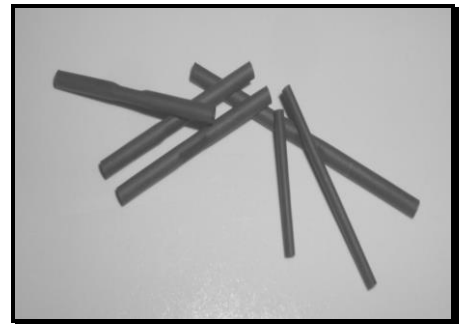

PART NUMBER KEY

F S S - M B K 2 5
SERIES LENGTH

S = Standard	25 = 25mm (Mini & Micro Only)
L = Slim	40 = 40mm
M = Mini	60 = 60mm (Standard & Slim Only)
R = Micro	

FOR ORDERS AND QUOTES:

Phone: 1-631-924-8108
Fax: 1-631-924-8109
Email: sales@splicetechnologies.com
Website: www.splicetechnologies.com