


RIBBON SERIES FUSION SPLICE PROTECTION SLEEVE

Splice Technologies' "Ribbon" series fusion splice protection sleeve is designed to accommodate **2 – 12** ribbon fiber. Stock lengths are 40mm, but are also available in a new 30mm length for smaller packaging requirements. This product is constructed with an inner EVA meltable adhesive tube, a polyolefin heat shrink outer tube and either single or dual strength members. Our single strength member sleeve which has become an industry standard, has an after shrink diameter of **4.9 X 4.4mm**, and utilizes a special glass member. Our dual strength member sleeve is designed to "sandwich" the ribbon, thus eliminating any undue stress on the fiber, and has an after shrink diameter of **5.7 X 4.9mm**. This option is available in a variety of glass and special high temperature plastic member combinations. The tubes are clear to allow viewing the color of the fiber after splicing. The entire assembly is heat bonded to ensure that all members maintain perfect alignment during shipping, handling and shrinking. We are proud to say that all of our products are made here in the USA and most sleeves are in stock ready for immediate delivery.

FEATURES

- Bellcore GR-1380 Compliant
- RoHS & REACH Compliant
- Outer tube meets SAE AMS-DTL-23053/5 Class 2
- Inner EVA meltable adhesive tube
- Full length strength member for total fiber support
- Close dimensional tolerances
- Heat bonded assembly
- Open ended assembly minimizing possibility of air entrapment during shrinkage
- Packaged in 25 per bag

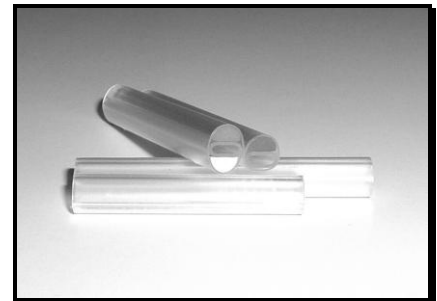

PART NUMBER KEY

MFSS-SQ40 40mm length w/single glass member
MFSS-SQ30 30mm length w/single glass member
MFSS-QQ40 40mm length w/two glass members
MFSS-QQ30 30mm length w/two glass members
MFSS-QP40 40mm length w/plastic/glass members
MFSS-QP30 30mm length w/plastic/glass members

FOR ORDERS AND QUOTES

Phone: 1-631-924-8108
Fax: 1-631-924-8109
Email: sales@splicetechnologies.com
Website: www.splicetechnologies.com