




## **THIN SERIES FUSION SPLICE PROTECTION SLEEVE**

**Splice Technologies' "THIN" Series** fusion splice protection sleeve is similar to our "Slim" series product with the exception of a further reduced after shrink diameter of **2.3mm** making it our thinnest offered splice sleeve with a strength member in a 60mm length. The robust design and user friendly size will accommodate fiber diameters up to **1.4mm**, and are available in 40 and 60mm lengths. This product is constructed with an EVA meltable adhesive inner tube, a polyolefin heat shrink outer tube, and a stainless steel strength member. The tubes are clear to allow viewing of the fiber during and after splicing. This product has been proportionately downsized using the same core materials, formulations and manufacturing processes that are used in our "Standard" series product. The entire assembly is designed to ensure that all members maintain perfect alignment during shipping, handling and shrinking. We are proud to say that all of our products are made here in the **USA** and most sleeves are in stock ready for immediate delivery.

### **FEATURES**

- Bellcore GR-1380 Compliant
- RoHS & REACH Compliant
- Outer tube meets SAE AMS-DTL-23053/5 Class 2
- Inner EVA meltable adhesive tube
- Full length strength member for total fiber support
- Close dimensional tolerances
- Open ended assembly minimizing possibility of air entrapment during heat shrinking
- Operating Temperature Range -55°C to +110°C
- Packaged in 100 per bag

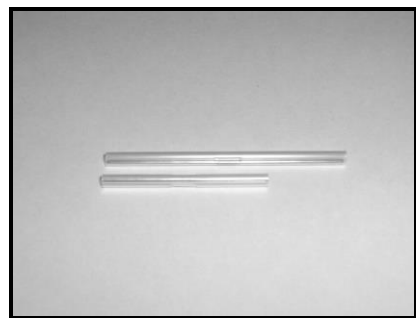

### **PART NUMBER KEY**

FSS-TC40    40mm length  
FSS-TC60    60mm length

### **FOR ORDERS AND QUOTES**

Phone: 1-631-924-8108  
Fax: 1-631-924-8109  
Email: [sales@splicetechnologies.com](mailto:sales@splicetechnologies.com)  
Website: [www.splicetechnologies.com](http://www.splicetechnologies.com)