


## **SLIM SERIES FUSION SPLICE PROTECTION SLEEVE**

**Splice Technologies' "Slim"** series fusion splice protection sleeve is similar to our "Standard" series product with the exception of a reduced after shrink diameter of **2.5mm**. The robust design and user friendly size, will also accommodate fiber diameters up to **1.4mm**. Stock lengths are 40 and 60mm, constructed with an inner EVA meltable adhesive tube, stainless steel strength member and a polyolefin heat shrink outer tube. The tubes are clear to allow viewing the color of the fiber after splicing. This product has been proportionately downsized using the same core materials, formulations and manufacturing processes that are used in our "Standard" series product. The entire assembly is heat bonded to ensure that all members maintain perfect alignment during shipping, handling and shrinking. We are proud to say that all of our products are made here in the USA, and most sleeves are in stock ready for immediate delivery.

### **FEATURES**

- RoHS & REACH Compliant
- Outer tube meets SAE AMS-DTL-23053/5 Class 2
- Inner EVA meltable adhesive tube
- Full length strength member for total fiber support
- Close dimensional tolerances
- Heat bonded assembly
- Open ended assembly minimizing possibility of air entrapment during shrinkage
- Packaged in 100 per bag

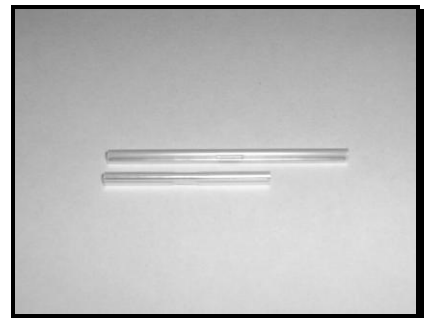

### **PART NUMBER KEY**

FSS-LC40 40mm length  
FSS-LC60 60mm length

### **FOR ORDERS AND QUOTES**

Phone: 1-631-924-8108  
Fax: 1-631-924-8109  
Email: [sales@splicetechnologies.com](mailto:sales@splicetechnologies.com)  
Website: [www.splicetechnologies.com](http://www.splicetechnologies.com)